CONTACT US: DIRECCION@SOLCORAUDIO.COM



CATALOGUE 2025







WE PROUDLY PRESENT OUR 6 UNES OF CABLES

EACH ONE MADE FOR DIFFERENT NECESSITIES AND BUDGETS














MICROPHONE CABLE

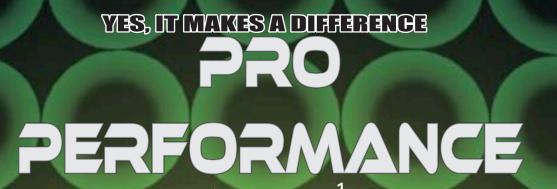

Contact us: direccion@solcoraudio.com



ITEM: 52TPPNP

 MANUFACTURED WITH CONDUCTOR: 2X24 AWG, OXYGEN FREE (OFC)

- SHIELDING COVERAGE: 98% "HIGH DENSITY WEAVE"
- OUTSIDE DIAMETER: 7.0mm
- MATERIAL: 99.9% PURE COPPER
- HAND SOLDERED WITH ANTI-CORROSIVE FLUX
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoH
- CONNECTORS: XLR JACK AND XLR PLUG, SOLID, ALL METALLIC, MADE FOR RUGGED ENVIRONMENTS
- AVAILABLE LENGTH: 20 FEET
 - MANUFACTURED WITH CONDUCTOR: 2X24 AWG, OXYGEN FREE (OFC)
 - SHIELDING COVERAGE: 98% "HIGH DENSITY WEAVE"
 - OUTSIDE DIAMETER: 7.0mm
 - MATERIAL: 99.9% PURE COPPER
 - HAND SOLDERED WITH ANTI-CORROSIVE FLUX
 - EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoH
 - CONNECTORS: XLR JACK AND XLR PLUG, SOLID DIAMOND, ALL METALLIC, MADE FOR RUGGED ENVIRONMENTS
 - AVAILABLE LENGTH: 20 FEET







INSTRUMENT CABLE YES, IT MAKES A DIFFERENCE PRO

Contact us: direccion@solcoraudio.com

PERFORMANCE

MADE IN MÉXICO

1_{PIECE}

ITEM: 61TPPNN6











• MANUFACTURED WITH CONDUCTOR: 1X20 AWG, OXYGEN FREE (OFC),

SHIELDING COVERAGE: 98% "HIGH DENSITY WEAVE"

OUTSIDE DIAMETER: 7.0mm

MATERIAL: 99.9% PURE COPPER, EXTRA FLEXIBLE PVC, RoHS.

HAND SOLDERED WITH ANTI-CORROSIVE FLUX

CONNECTORS: 2 1/4" PLUGS, SOLCOR METALLIC, BLACK AND SMOKED WITH DOUBLE SHRINKING TUBE FOR STRAIN RELIEF AND PROTECTION

AVAILABLE LENGTH: 20 ft





MICROPHONE BALANCED CABLE

- MANUFACTURED WITH CONDUCTOR: 2X22 AWG, OXYGEN FREE (OFC)
- SHIELDING COVERAGE: 99% "HIGH DENSITY WEAVE"
- OUTSIDE DIAMETER: 8.0mm
- MATERIAL: 99.9% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, Rohs.
- CONNECTORS: XLR JACK AND XLR PLUG NEUTRIK
- AVAILABLE LENGTH: 10,20,30,50 AND 100 FEET



TEM:39BF







ITEM: 61CCH

CLASSIC COILED INSTRUMENT CABLE

- MANUFACTURED WITH CONDUCTOR: 1X20 AWG, OXYGEN FREE (OFC),
- SHIELDING COVERAGE.: 99% "HIGH DENSITY WEAVE"
- OUTSIDE DIAMETER: 8.0mm
- MATERIAL: 99.9% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 2 1/4" PLUGS, STRAIGHT AND RA G&H,
 DOUBLE SHRINKING TUBE
- AVAILABLE LENGTH: 25, 30 ft

INSTRUMENT CABLE RAPLUG

- MANUFACTURED WITH CONDUCTOR: 1X20 AWG, OXYGEN FREE (OFC),
- SHIELDING COVERAGE: 99% "HIGH DENSITY WEAVE".
- OUTSIDE DIAMETER: 8.0mm
- MATERIAL: 99.9% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 2 1/4" PLUGS, STRAIGHT AND RA G&H, DOUBLE SHRINKING TUBE
- AVAILABLE LENGTH: 10, 20, 30 ft



ITEM: 4IME





SPEAKER CABLE



ITEM:8BOC

- MANUFACTURED WITH: 2X14 AWG CABLE, OXYGEN FREE (OFC)
- MATERIAL: 99.9% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: NEUTRIK 1/4"
 JUMBO PLUGS
- AVAILABLE LENGTH: 3,6 ft



ITEM:95PE

- MANUFACTURED WITH: 2X14 AWG CABLE, OXYGEN FREE (OFC)
- MATERIAL: 99.9% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: NEUTRIK SPEAKON
- AVAILABLE LENGTH: 25,50 ft



Contact us:

direccion@solcoraudio.com



MICROPHONE BALANCED CABLE



ITEM:52BSW

- MANUFACTURED WITH: 2X22 AWG,
 7 mm OD
- OXYGEN FREE (OFC)
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 2-XLR SWITCHCRAFT
- LENGTH: 6 , 10, 15, 20, 25, 30 FT

INSTRUMENT CABLE



ITEM:61SW

- MANUFACTURED WITH: 1X20 AWG, OXYGEN FREE (OFC)
- SHIELDING COVERAGE: 95% braided mesh shielding
- OUTSIDE DIAMETER: 7.0mm
- MATERIAL: 99.9% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- AVAILABLE LENGTH: 15, 20, 25, 30 ft
- CONNECTORS: 1/4" Switchcraft PLUG, with double shrinking tube



Contact us:

direccion@solcoraudio.com

BALANCED TRS

1/4" PLUGS



ITEM:52TRSW

- MANUFACTURED WITH: 2X22 AWG, 7 mm OD
- OXYGEN FREE (OFC)
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 2 TRS SWITCHCRAFT 1/4" PLUG
- LENGTH:10, 15 FT



TRS 1/4"PLUG / 2 1/4" PLUG



ITEM:26INSW6F

- MANUFACTURED WITH: 2X22AWG, 7 mm OD
- OXYGEN FREE (OFC)
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: TRS Switchcraft Silver connector, 2-1/4" Switchcraft PLUG
- LENGTH: 6 FT
- Y" inserts, with the assembly encapsulated through a PVC molding



TRS 1/4"PLUG / 2
MALE XLR



ITEM:23INSW6F

- MANUFACTURED WITH: 2X22AWG, 7 mm OD
- OXYGEN FREE (OFC)
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- Silver CONNECTORS:2-XLR SWITCHCRAFT/ 1/4"
 TRS SWITCHCRAFT PLUG
 - LENGTH: 6 FT
 - Y" inserts, with the assembly encapsulated through a PVC molding

Contact us:

direccion@solcoraudio.com



TRS 1/8"PLUG // 2 MXLRPLUG



ITEM:24INSW6F

- MANUFACTURED WITH: 2X22 AWG, 7 mm OD
- OXYGEN FREE (OFC)
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 2 M XLR SWITCHCRAFT/ 1/8" PLUG
- LENGTH:6 FT

TRS 1/8"PLUG / 2 1/4" PLUG



ITEM:25INSW6F

- MANUFACTURED WITH: 2X22 AWG, 7 mm OD
- OXYGEN FREE (OFC)
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: TRS 1/8" PLUG, 2-1/4" Switchcraft PLUG
- LENGTH: 6 FT










MEM: 611146

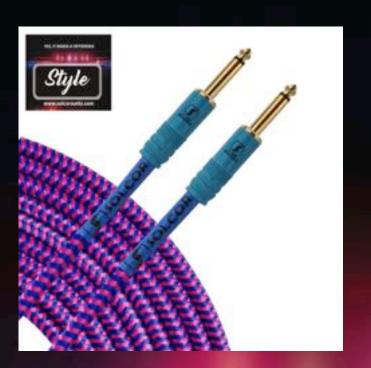

MEM: 61TJYP



MEM: 61TJYCF



MEM: 611140

MANUFACTURED WITH: 1X20 AWG, OXYGEN FREE (OFC)

SHIELDING COVERAGE: 99% BRAIDED MESH, "HIGH DENSITY WEAVE"

OUTSIDE DIAMETER: 7.0mm

MATERIAL: 99.9% PURE COPPER

EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.

AVAILABLE LENGTH: 10, 20 ft


CONNECTORS: METALLIC 1/4" COLORED PLUGS OR RIGHT ANGLE PLUG AVAILABLE











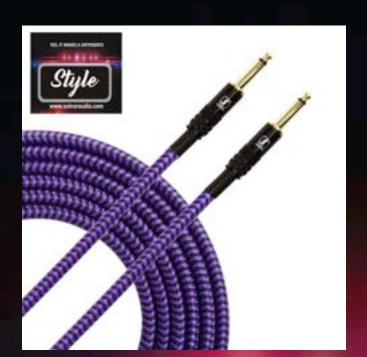

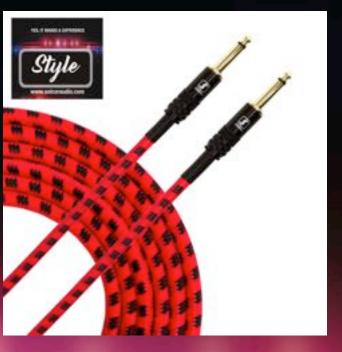

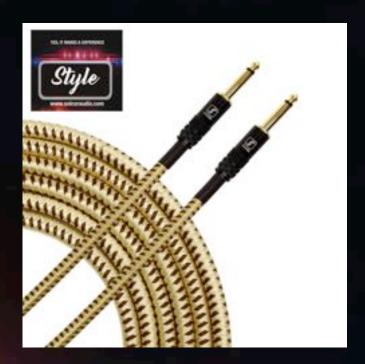

MEM: 61TJYOR MEM: 61TJYPB

MEM: 61TJYRB

MEM: 61774W

MANUFACTURED WITH: 1X20 AWG, OXYGEN FREE (OFC)

SHIELDING COVERAGE: 99% BRAIDED MESH, "HIGH DENSITY WEAVE"

OUTSIDE DIAMETER: 7.0mm

MATERIAL: 99.9% PURE COPPER

EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.

AVAILABLE LENGTH: 10, 20 ft


CONNECTORS: METALLIC 1/4" COLORED PLUGS OR RIGHT ANGLE PLUG AVAILABLE










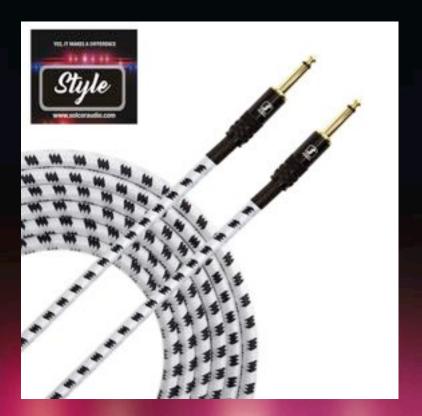

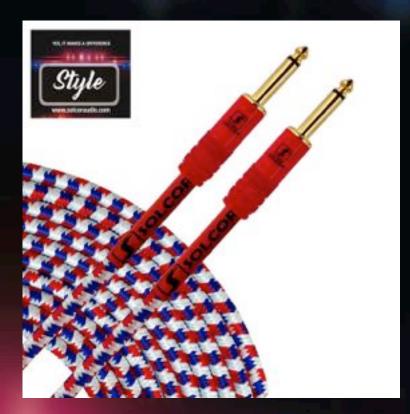

MEM: 617/WG

MEM: 611JYBW

MEM: 61TJYR

MANUFACTURED WITH: 1X20 AWG, OXYGEN FREE (OFC)

SHIELDING COVERAGE: 99% BRAIDED MESH, "HIGH DENSITY WEAVE"

OUTSIDE DIAMETER: 7.0mm

MATERIAL: 99.9% PURE COPPER

EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.

AVAILABLE LENGTH: 10, 20 ft


CONNECTORS: METALLIC 1/4" COLORED PLUGS OR RIGHT ANGLE PLUG AVAILABLE









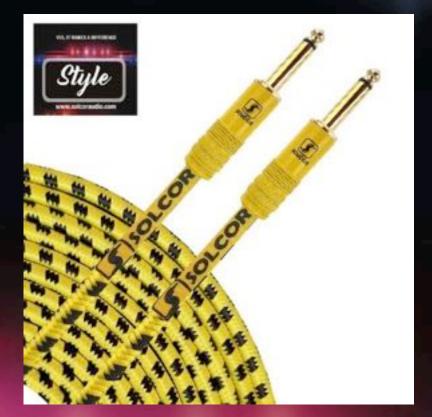

MEM: 61114B

MEM: 611144

MANUFACTURED WITH: 1X20 AWG, OXYGEN FREE (OFC)

SHIELDING COVERAGE: 99% BRAIDED MESH, "HIGH DENSITY WEAVE"

OUTSIDE DIAMETER: 7.0mm

MATERIAL: 99.9% PURE COPPER

EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.

AVAILABLE LENGTH: 10, 20 ft

CONNECTORS: METALLIC 1/4" COLORED PLUGS OR RIGHT ANGLE AVAILABLE



COILED INSTRUMENT CABLE




Contact us: direccion@solcoraudio.com







MEM:61RYB

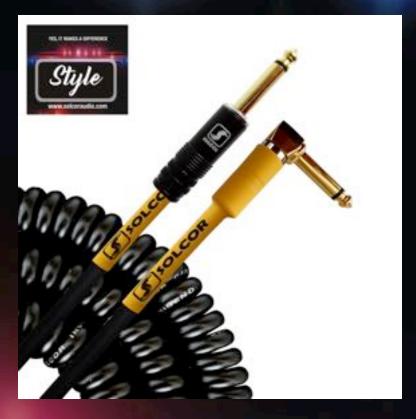

MEM:61RYBK

MANUFACTURED WITH: 1X20 AWG, OXYGEN FREE (OFC)

SHIELDING COVERAGE: 70% BRAIDED MESH

OUTSIDE DIAMETER: 6.5 mm

MATERIAL: 99.9% PURE COPPER

EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.

AVAILABLE LENGTH: 10, 20 ft

CONNECTORS: METALLIC 1/4" COLORED PLUGS RIGHT ANGLE PLUG



COILED INSTRUMENT CABLE



Contact us: direccion@solcoraudio.com





MEM:61RYW MEM:61RYP

MANUFACTURED WITH: 1X20 AWG, OXYGEN FREE (OFC)

SHIELDING COVERAGE: 70% BRAIDED MESH

OUTSIDE DIAMETER: 6.5 mm

MATERIAL: 99.9% PURE COPPER

EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.

AVAILABLE LENGTH: 10, 20 ft

CONNECTORS: METALLIC 1/4" COLORED PLUGS AND RIGHT ANGLE PLUG



XLR CABLES

Standard

Contact us: direccion@solcoraudio.com

UNBALANCED





- MANUFACTURED WITH: 1X20 AWG, 6.5 mm OD
- OXYGEN FREE (OFC)
- 95% SHIELDING COVERAGE
 BRAIDED MESH MADE OF 99.5%
 PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 1/4" PLUG/ F XLR, WITH DOUBLE SHRINKING TUBE
- LENGTH: 6 FT



ITEM: 5226M25F

- MANUFACTURED WITH: 1X20 AWG, 6.5 mm OD
- OXYGEN FREE (OFC)
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 1/4" PLUG/ M XLR

• LENGTH: 25 FT

BALANCED



ITEM: 5226L

- MANUFACTURED WITH: 2X24 AWG, 6.5 mm OD
- OXYGEN FREE (OFC)
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: F XLR / M XLR
- LENGTH: 3, 6, 10, 15, 20 & 30 FT



INSTRUMENT CABLES

Standard

Contact us: direccion@solcoraudio.com



ITEM: 6103L

- CONDUCTOR: 1X20 AWG, OXYGEN FREE (OFC)
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- OUTSIDE DIAMETER: 6.5mm
- MATERIAL: 99% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 2 METAL 1/4" PLUG WITH DOUBLE SHRINKING TUBE
- AVAILABLE LENGTHS: 10, 15, 20, 25 AND 30 FT.



ITEM: 6103LE

- CONDUCTOR: 1X20 AWG, OXYGEN FREE (OFC)
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- OUTSIDE DIAMETER: 6.5 mm
- MATERIAL: 99% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 1 METAL 1/4" PLUG and 1 right angle 1/4 PLUG
- AVAILABLE LENGTHS: 20 FT



INSERT CABLES

Standard

Contact us: direccion@solcoraudio.com



ITEM: 26IN06F

- MANUFACTURED WITH: 2X24
 AWG / 1X20 AWG, 6.5 mm OD
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- CONNECTORS: PLUG 1/4"TRS AND 2 PLUG 1/4" TS
- LENGTH: 6FT
- PVC ENCAPSULATED ASSEMBLY, TO PROTECT UNION OF ALL ENDS.



ITEM: 23IN06F

- MANUFACTURED WITH: 2X24 AWG, 6.5 mm OD.
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- CONNECTORS: 1 TRS 1/4" PLUG / 2 MALE XLR
- LENGTH: 6 ft
- PVC ENCAPSULATED ASSEMBLY, TO PROTECT UNION OF ALL ENDS.



ITEM: 25IN06F

- MANUFACTURED WITH: 2X24 AWG, 6.5 mm OD.
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- CONNECTORS: TRS 1/8" "PLUG / 2 1/4" PLUG
- LENGTH: 6 ft
- PVC ENCAPSULATED ASSEMBLY, TO PROTECT UNION OF ALL ENDS.



INSERT/PEDAL CABLES



ITEM: 24IN06F

- MANUFACTURED WITH: 2X24
 / 1X20 AWG, 6.5 mm OD
- 95% SHIELDING COVERAGE
 BRAIDED MESH MADE OF
 99.5% PURE COPPER
- CONNECTORS: PLUG 1/8" TRS/ 2 XLR MALE PLUGS
- LENGTH: 6FT
- PVC ENCAPSULATED
 ASSEMBLY, TO PROTECT
 UNION OF ALL ENDS.

Standard



ITEM: 29IN06F

- MANUFACTURED WITH: 2X24 / 1X20 AWG, 6.5 mm OD
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- CONNECTORS: 1/8" PLUG TRS/ 2 RCA MALE PLUGS
- LENGTH: 6FT
- PVC ENCAPSULATED ASSEMBLY, TO PROTECT UNION OF ALL ENDS.





ITEM: 6103P_

- MANUFACTURED WITH: 1X20 AWG, 6.5 mm OD
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- CONNECTORS: 2 ¼" RIGHT ANGLE PLUGS
- LENGTH: 1 FT



Standard

SPEAKER CABLE



ITEM: 07B

- MANUFACTURED WITH: 2X16
 AWG, OXYGEN FREE (OFC)
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 2 TS 1/4" PLUG WITH DOUBLE SHRINKING TUBE
- LENGTH:6, 10, 20, 30, 40, 50, 100

DMX CABLE



ITEM:1088

- MANUFACTURED WITH: 2X24 AWG, 6.5 mm OD
- OXYGEN FREE (OFC)
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 2 XLR ALL BLACK
- LENGTH:3, 6, 10, 15, 20, 30

Contact us: direccion@solcoraudio.com

HYBRID CABLE



ITEM:13HDP

- MANUFACTURED WITH: 2X24, 3X14 AWG, OXYGEN FREE (OFC)
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- OUTSIDE DIAMETER: 17 mm
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 2MF XLR, 2MF SPEAKON
- COLOR: BLACK
- AVAILABLE LENGTH: 3,6 FT





BALANCED TRS CABLE

AUXILIARY CABLE



ITEM: 52TRS_F

- MANUFACTURED WITH: 2X24 AWG, 6.5 mm OD
- OXYGEN FREE (OFC), .
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 2 TRS 1/4" PLUG
- LENGTH:10, 20 FT



ITEM: 61AUX210F

- MANUFACTURED WITH: 2X24 AWG, 6.5 mm OD
- OXYGEN FREE (OFC), .
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 1 TRS 1/8" PLUG AND 1 M XLR
- LENGTH:10



ITEM:61AUX110F

- CONDUCTIVE MANUFACTURING: 2X24 AWG, OXYGEN FREE (OFC), .
- 95% SHIELDING COVERAGE BRAIDED MESH MADE OF 99.5% PURE COPPER
- OUTSIDE DIAMETER: 6.5 mm
- EXTERIOR INSULATION: EXTRA FLEXIBLE PVC, RoHS.
- CONNECTORS: 1/4" TO 1/8" TRS PLUG
- COLOR: BLACK,
- AVAILABLE LENGTH: 10 FT









ITEM: 27IM



BALANCED MICROPHONE CABLE

- MANUFACTURED WITH 2X24 AWG CONDUCTOR.
- 60% SHIELDING COVERAGE IN HELICAL MESH.
- · OUTSIDE DIAMETER: 5.9 MM
- · CONNECTORS: XLR CONNECTORS
- · MATERIAL: 99.5% PURE COPPER
- EXTERIOR INSULATION: PVC 60
- AVAILABLE LENGTH: 10,15, 20 FT
- · RESISTANCE: 85 OHMS PER 1 KM

INSTRUMENT CABLE

- MANUFACTURED WITH 1X24 AWG CONDUCTOR
- 60% SHIELDING COVERAGE IN HELICAL MESH
- OUTSIDE DIAMETER: 5.8MM
- CONNECTORS: 1/4" PLUGS
- MATERIAL: 99.5% PURE COPPER
- EXTERIOR INSULATION: PVC 60
- AVAILABLE LENGTH: 10,15, 20 FT
- BOLOOR . RESISTANCE: 85 OHMS PER I KM



ANALOG SNAKE

DIFFERENT CONFIGURATIONS:

- 8 CHANNELS, 4 RETURNS, 30ft
- 16 CHANNELS, 4 RETURNS, 100ft
- 24 CHANNELS, 4 RETURNS, 100ft
- 24 CHANNELS, 8 RETURNS, 100ft
- 32 CHANNELS, 8 RETURNS, 100ft
- 1) THICKER CABLE AND STAGE BOX.
- 2) ORIGINAL BRAND CONNECTORS (SWITCHCRAFT, NEUTRIK, SOLCOR)
- 3) BLIND RIVET ATTACHED CONNECTORS.
- 4) METAL STRAIN RELIEF.
- 5) HAND SOLDERED.
- 6) 100% TESTED.
- 7) 3 YEAR GUARANTEE.
- 8) WE MAKE SPECIAL LENGTHS AND CONFIGURATIONS.

Contact us: direccion@solcoraudio.com



ETHERNET

- BLACK UTP CAT6 CABLE WITH RJ45.
- LENGTH: 10-200 ft
- 4 TWISTED PAIRS, 6.4mm OD
- USEFUL FOR ALL AUDIO, LIGHTING AND DATA APPLICATIONS
- PE INNER SEPARATOR
- SEETRONIK RJ 45 SHELL XLR TYPE



Contact us: direccion@solcoraudio.com